




spring clamp terminal block with 1 diode 1N4007, 2.5 mm², grey

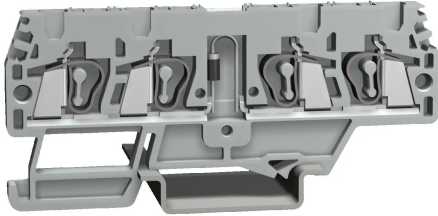

| | |
|--|--|
| Series | HMM |
| Code | HM598GR |
| Type | HMM.2/2+2/D1A/GR |
| HS code | 85369010 |
| Colour | grey |
| TECHNICAL FEATURES | |
| Function/Type | With 1 A diode |
| Rated cross-section | 2.5 mm ² |
| Connecting capacity | |
| Flexible wire | 0.2-4 mm ² |
| Rigid wire | 0.2-4 mm ² |
| Wire with ferrule - ferrule type | 2.5 mm ² - WP25/14 |
| Electrical characteristics according to IEC EN standard | |
| Maximum voltage AC/DC | 800 V |
| Maximum current (rated cross-section) | 1 A (1) |
| Caliber | A3 |
| Type of component | Diode (1N4007) |
| Rated voltage | 1000 V _{rrm} / 1.1 V _f |
| Rated impulse withstand voltage / pollution degree | 1 kV / 3 (1) |
| Insulation stripping length | 10 mm |
| Width (pitch) | 5.2 mm |
| Length | 82 mm |
| Height mounted on TH35-7.5/TH35-15/G32 | 41 / 49 / - mm |
| Insulation material temperature index (EN 60216-1) | 130 °C |
| Plastic material | Polyamide UL94V-0 |
| ACCESSORIES | |
| End section | |
| Grey | HMT.2/2+2/PT/GR (cod. HM521GR) |
| Blue | - |
| Thickness | 1.5 mm |
| Cross-connection | |
| Model A) | - |
| Model B) | - |
| Coloured partition plate | - |
| Cross-connection barrier | - |
| Test plug | SDD/1 (cod. DD001) |
| Modular test plug | SDH/5 (cod. DH005) |
| End section for modular test plug | SH5/PT (cod. DH501) |
| Marking | |
| Single marking tag | CNU/8/51 (cod. NU0851S) |
| Single marking tag for pitch insertion | - |
| End bracket | |
| TH35 screw type | BT/3 (cod. BT003) |
| TH35 snap-fit type | BTO (cod. BT007) |
| TH35 and G32 snap-fit type | BTU (cod. BT005) |
| DIN rail according to IEC 60715/TH35 | PR/3/.. |
| APPROVALS AND MARKINGS | |



DESCRIZIONE DEL PRODOTTO

spring clamp terminal block with 1 diode 1N4007, 2.5 mm², grey