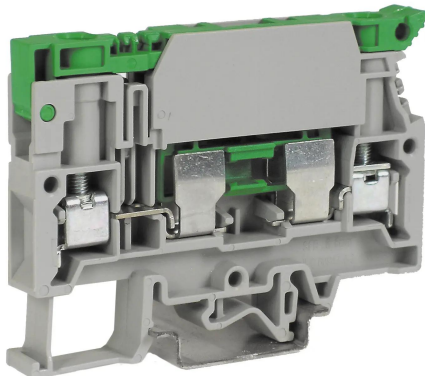




screw terminal block 1 level fuse-holder, 6 mm<sup>2</sup>, grey



Type	SFR.6M	SFR.6
Voltage (V)	250	250
Current (A)	6.3/10	2.5/10
	IRMS	IRMS
	MAX.	MAX.
<b>PROTECTION AGAINST OVERLOAD AND SHORT CIRCUIT</b>		
Single configuration	2.5W	0W
	16.500	11000
	(In)	(In)
Composite configuration	2.5W	2.5W
	16.500	11000
	(In)	(In)
<b>PROTECTION AGAINST SHORT CIRCUIT</b>		
Single configuration	4W (15A)	0W
	11000	11000
	(In)	(In)
Composite configuration	4W (15A)	0W
	11000	11000
	(In)	(In)

<b>Series</b>	SFR – CBF
<b>Code</b>	SR500GR
<b>Type</b>	SFR.6/M/GR
<b>HS code</b>	85369010
<b>Colour</b>	grey
<b>TECHNICAL FEATURES</b>	
<b>Function/Type</b>	Fuse-holder 5x20
<b>Rated cross-section</b>	6 mm <sup>2</sup>
<b>Connecting capacity</b>	
<b>Flexible wire</b>	0.2-10 mm <sup>2</sup>
<b>Rigid wire</b>	0.2-10 mm <sup>2</sup>
<b>Wire with ferrule - ferrule type</b>	6 mm <sup>2</sup> – WP60/20
<b>Electrical characteristics according to IEC EN standard</b>	
<b>Maximum voltage AC/DC</b>	630 V
<b>Maximum current (rated cross-section)</b>	10 A (19 A con CO/5) (1)
<b>Caliber</b>	A5
<b>Electrical characteristics according to UL Standard</b>	
<b>Maximum voltage AC/DC</b>	600 V
<b>Maximum current (rated cross-section)</b>	6.3 A
<b>Section (min-max)</b>	20-8 (AWG)
<b>Tightening torque value (UL)</b>	13 lb.in
<b>Electrical characteristics according to ATEX directive and IEC Ex standard</b>	
<b>Rated impulse withstand voltage / pollution degree</b>	6 kV / 3
<b>Insulation stripping length</b>	11 mm
<b>Tightening torque value (nom. / max.)</b>	0.8 / 1.4 Nm
<b>Width (pitch)</b>	10 mm
<b>Length</b>	79 mm
<b>Height mounted on TH35-7.5/TH35-15/G32</b>	59 / 67 / 63 mm
<b>Insulation material temperature index (EN 60216-1)</b>	130 °C
<b>Plastic material</b>	Polyamide UL94V-0
<b>ACCESSORIES</b>	
<b>End section</b>	
<b>Grey</b>	SFR.6/PT/GR (cod. SR301GR)
<b>Blue</b>	SFR.6/PT (Ex)i (cod. SR401)
<b>Beige</b>	SFR.6/PT (cod. SR301)
<b>Thickness</b>	1.5 mm
<b>Cross-connection</b>	
<b>Model A)</b>	PTC/20/... (cod. PTC20...)
<b>Model B)</b>	-
<b>Rated current carrying capacity IEC/ATEX</b>	25 A
<b>Cross-connection identification strip</b>	PTC/SP (cod. PTC0990)
<b>Coloured partition plate</b>	DFU/7/R (cod. DU07R)
<b>Cross-connection barrier</b>	DFM/300 (cod. DF300)
<b>Test plug socket</b>	SDD/1 (cod. DD001)
<b>Test plug</b>	SDD/1 (cod. DD001)
<b>Marking</b>	
<b>Snap-on numbering strip</b>	CNU/8/51 (cod. NU0851S) – CNU/10/61 (cod. NU1061S)
<b>Single marking tag</b>	-
<b>Fuse type</b>	5x20 mm (1)
<b>Conductive element</b>	CO/5 (cod. VL103)
<b>Light alarm circuit (12...48 V)</b>	KITLSN/12-24 (cod. KIT1224)
<b>Light alarm circuit (110...230 V)</b>	-
<b>End bracket</b>	
<b>TH35 screw type</b>	BT/3 (cod. BT003)
<b>TH35 snap-fit type</b>	BTO (cod. BT007)
<b>TH35 and G32 snap-fit type</b>	BTU (cod. BT005)
<b>Mounting rail</b>	
<b>IEC 60715/TH35</b>	PR/3/...
<b>IEC 60715/G32</b>	-
<b>APPROVALS AND MARKINGS</b>	
	



\* Suitable for 5x20 mm fuses\* Can be use as disconnecter, using the accessory, to be inserted in place of the fuse\* Accessory with alarm LED, available separately\* Fuse available separately  
1 For more details on accessories, refer to the relevant chapters2 (1) 10 A with fuse or 19 A with CO/5

## DESCRIZIONE DEL PRODOTTO

screw terminal block 1 level fuse-holder, 6 mm<sup>2</sup>, grey